



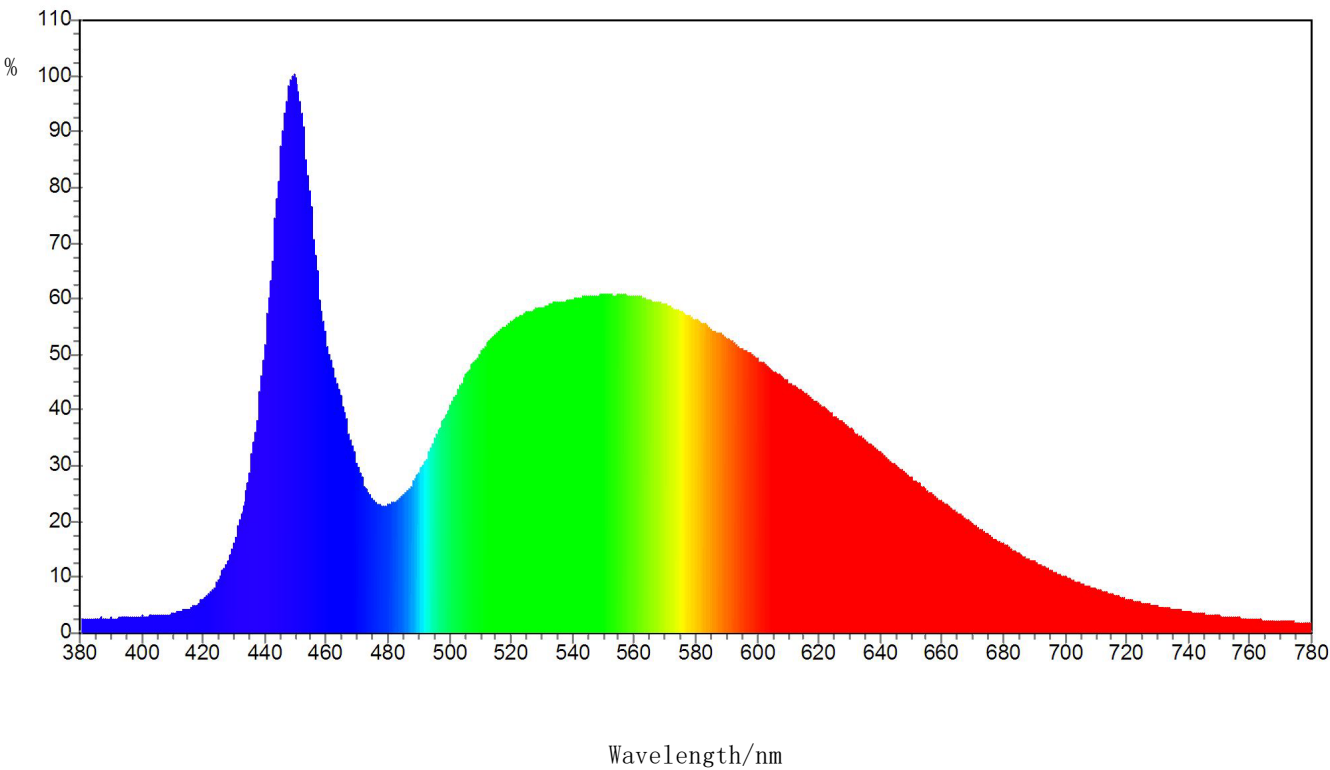

Spectrum Parameters

x:	0.3297		y:	0.3636	
u:	0.1967		v:	0.3254	
WD:	548.2 nm		WP:	449.8 nm	
HW:	21.3 nm		Purity:	0.082	
CCT:	5609 K		Ra:	79.2	
SDCM:	14.24		DUV:	0.0123	
R%:	26.5	G%:	45.7	B%:	27.8
R1:	74.6	R2:	81.5	R3:	88.8
R4:	80.7	R5:	78.0	R6:	77.8
R7:	85.8	R8:	66.4	R9:	-0.6
R10:	58.8	R11:	88.2	R12:	52.2
R13:	75.1	R14:	94.0	R15:	68.8
Kred	16.08%	Kgreen	78.00%	Kblue	5.92%

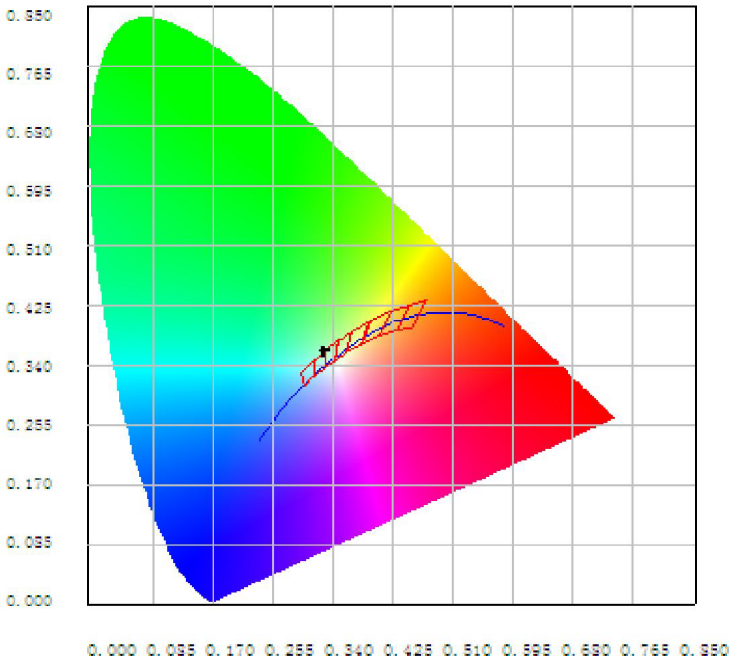

Electrical parameters

Flux:	17071.807 lm	P:	84.098 lm/w	P:	50367.54 mw		
I:	986.0 mA	V:	230.80 V	P:	203.000 w	PF:	0.8920

Memo:

F200PRO

Product Mode:	LED Flood Light	Item No:	2
Tester:	Hu Baoliang	Date:	2017-11-25
Temperature:	18	Humidity:	62
Manufacturer:	TYF	organization:	Eurostar Electric